

# L&W CO<sub>2</sub> Filter



Due to the large increase of CO<sub>2</sub> in the ambient air during the recent years the filling of breathing air bottles according to EN 12021 is not always guaranteed.


The new L&W CO<sub>2</sub> Filter is the professional solution to reduce the CO<sub>2</sub> value below the permissible limit in the intake section of the compressor.

## Specification

- » Painted steel frame (RAL 6026)
- » Holder with quick release for CO<sub>2</sub> filter cartridge
- » Intake hose connection Ø 32 mm
- » 2 meters connecting hose (Inside-Ø 32 mm)
- » CO<sub>2</sub> filter cartridge

## Options

- » Wall mounting kit
- » Stand for CO<sub>2</sub> Filter (390 x 400 x 1250 mm, 19 kg)
- » Intake hose connection Ø 50 mm / Ø 76 mm
- » Intake hose

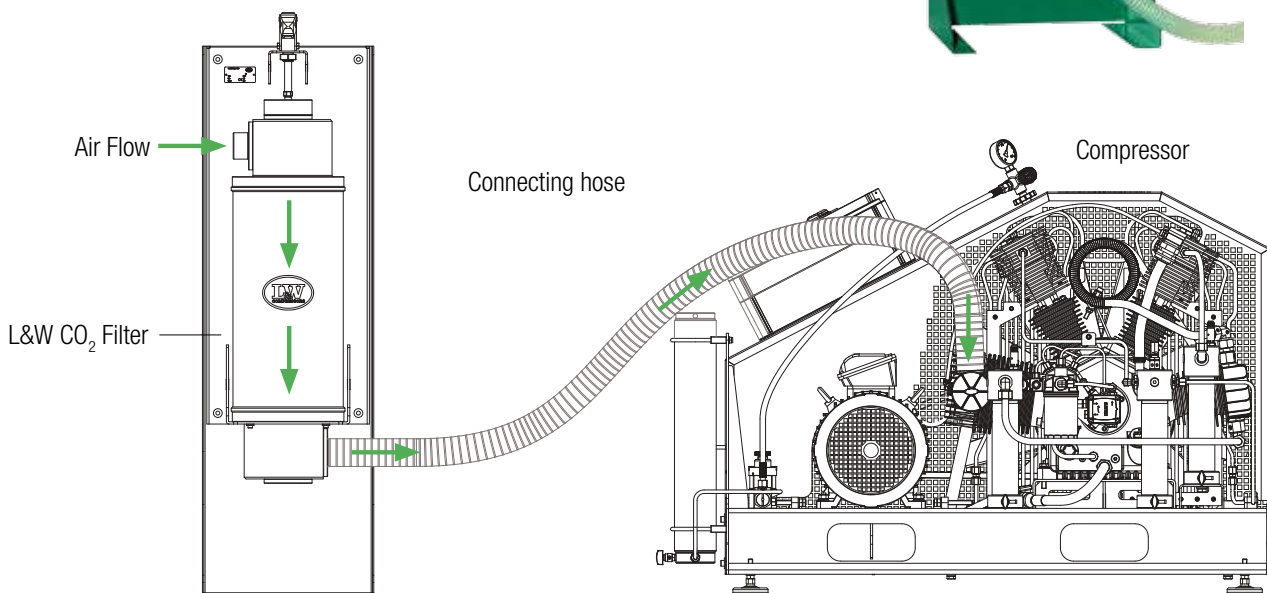

## Technische Daten

Technical Data	L&W CO <sub>2</sub> Filter
Medium	Breathing air
Intake pressure:	Atmospheric
Flow rate [l/min]:	100 - 750
Lifetime [working hours]:	80*
Operating temperature [°C]:	+5 to +45
Dimensions W x D x H [mm]:	370 x 330 x 1075
Weight [kg]:	42.5

\* at 700 l/min flow rate and 1000 ppm CO<sub>2</sub> concentration in the intake area.  
Attention: The lifetime depends on the ambient air

## Lenhardt & Wagner GmbH

An der Tuchbleiche 39  
68623 Hüttenfeld/Germany

Phone: +49 (0)62 56 - 8 58 80 -0

Fax: +49 (0)62 56 - 8 58 80 -14

eMail: [service@lw-compressors.com](mailto:service@lw-compressors.com)

Internet: [www.lw-compressors.com](http://www.lw-compressors.com)